




More about  
advintec® 6D laser measurement

### Benefits

- **High precision 6D laser measurement**
  - No calibration tools or reference parts required (high cost savings)
- **Robot program corrections take place directly and automatically within the ongoing production process**
  - No failures caused by positioning factors
  - Avoids collisions
- **Eliminates manual program corrections**
- **Simple to integrate and use**
- **Simple commissioning via supplied robot program**
- **High tolerance to ambient light**
- **Measurement time starting at 3 sec.** (dependent on configuration and application)
- **Cost savings compared to conventional mechanical systems**

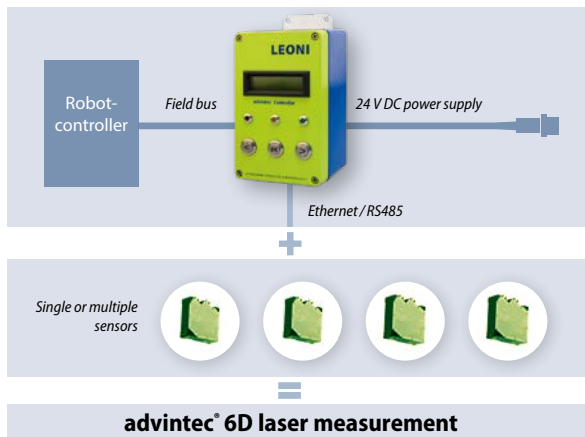

### Factory Automation

[www.leoni-factory-automation.com](http://www.leoni-factory-automation.com)

[@LeoniFactoryAutomation](https://twitter.com/LeoniFactoryAutomation)

### Business Unit Robotic Solutions

LEONI protec cable systems GmbH

Brüsseler Strasse 12  
30539 Hanover, Germany  
+49 511 820793-30

Hausinger Strasse 4  
40764 Langenfeld, Germany  
+49 2173 1010-791

An der Auehuetten 10  
98574 Schmalkalden, Germany  
+49 3683 6505-0

# advintec® 6D laser measurement

Calibration systems for grippers, parts  
and fixtures in up to 6 dimensions

Inline

High precision

Fast



**The Quality Connection**

**LEONI**

# Overview

## advintec® 6D laser measurement



### Unracking

#### Task

To ensure correct gripping of bodywork components, e.g. bonnets, side and roof panels etc, from racks or storage systems.

#### Solution

- 6D-measurement of the part position (translational and rotational) via integrated sensors in the gripper (laser or ultrasonic).
  - Gripping position is corrected automatically.
- The system is compact, lightweight, robust and integrated directly into the gripper for easy integration to the production line with no costly modifications required.



### Gripper measurement

#### Task

To measure grippers or gripped parts for precision handling, e.g. for power-train applications, such as engine and transmission parts.

#### Solution

- 6D laser measurement of grippers / gripped parts using stationary sensors.
- Changes in the gripper / part position are detected early and corrected online. This avoids collisions and optimises precision positioning.



### Part location

#### Task

To ensure the correct processing position of parts for precision applications such as handling, welding, sealing, milling etc.

#### Solution

- 6D laser measurement of the position of components and fixtures.
- The robot path is automatically corrected according to component position to ensure processing always takes place in the correct location.